



## VENDED LAUNDRY T-650 EXPRESS WASHER



# T-650 EXPRESS WASHER

Dexter C-Series Washer Powered by DexterLive Controls

### Vended laundry solutions you can depend on.

Dexter C-Series washers are engineered to show up for work in even the harshest laundry environments. Featuring DexterLive controls, next generation components, and high quality materials, each C-Series washer is designed to help make you more successful.

A store full of laundry equipment is a big investment and choosing the right equipment is an important decision. Our products will provide you the efficiency, flexibility, performance, and durability you need to be confident in your choice. With lifetime technical support and an industry leading 10 year limited warranty, you can be confident that we will stand behind every washer you invest in.

**Contact your Dexter Authorized Distributor today for more details.**

### DURABLE:

With heavy-duty bearings in a cast iron bearing housing, a welded steel spider and shaft, and a rugged frame design that has been proven over two decades, Dexter washers are built to last.

Every model is tested thoroughly with our 1,000 hour out-of-balance test.

The polished chrome doors and AISI 304 stainless steel tub, cylinder, top, front, and side panels keep washers looking great year after year.

### RELIABLE:

Our industry leading 10 year warranty covers the frame, tub, cylinder, shaft, seals, bearings, and bearing housing.

A 3 year parts warranty covers the rest.

We stand behind every machine you invest in with lifetime technical support.

### EFFICIENT:

A new electronic pressure sensor offers a range of water level options to increase efficiency and help save on water expenses.

Next generation inverter drives lower electrical usage, improve performance, and extend the life of the motor.

Powerful Express 200 g-force extraction removes more water to reduce dry time and helps save on energy costs.

### INSTALLATION:

Adjustable final extract speeds and other customizable options allow Dexter washers to fit almost any installation.

This Dexter washer fits through a standard 36" doorway.

### PROFITABLE:

Every Dexter machine is now easier to use with a common user interface on all products, multiple language options, and detailed customer prompts.

DexterLive controls work with DexterLive.com to allow you to create custom programs that fit your business.

A variety of PLUS cycle features and promotion options will help you maximize revenue generation.

### OPTIONS:

Available with blue or black graphics.

Your washers can be shipped with coin acceptors or payment system ready.

Dexter C-Series 200G Express washers are available in 20lb, 30lb, 40lb, 60lb, and 90lb capacities.

EMPLOYEE OWNED | MADE IN THE USA | SINCE 1894

**DEXTER.COM**

2211 WEST GRIMES AVENUE, FAIRFIELD, IOWA 52556 USA

**1.800.524.2954**

# T-650 EXPRESS WASHER SPECIFICATIONS

VENDED LAUNDRY

## Capacity:

Dry Weight Capacity	40 lb	(18.1 kg)
Cylinder Volume	6 cu ft	(170 L)

## Speed:

High Extract Speed	200 g	(750 RPM)
Intermediate Extract Speed	60 g	(411 RPM)
Washing Speed	0.9 g	(50 RPM)
Motor Size	2 hp	(1.5 kW)

## Dimensions:

Cabinet Height	53"	(134.6 cm)
Cabinet Width	29 7/8"	(75.9 cm)
Cabinet Depth	38 1/8"	(96.8 cm)
Door Opening	15 1/4"	(38.7 cm)
Floor to Door Bottom	16 1/4"	(41.3 cm)
Cylinder Diameter	25"	(63.5 cm)
Cylinder Depth	21 1/8"	(53.7 cm)

## Weight:

Net Weight	744 lbs	(337.5 kg)
------------	---------	------------

## Shipping Information:

Shipping Weight	766 lbs	(347.5 kg)
Shipping Height	58"	(147.3 cm)
Shipping Width	31 1/2"	(80 cm)
Shipping Depth	43 3/4"	(111.1 cm)

## Water Requirements:

Water Inlet Size	3/4"	(19 mm)
Flow Rate (per min)	9 gal	(34.1 L)
Pressure (min/max)	30-120 psi	(207-827 kPa)
Approximate Water Usage (per cycle)	35.1 gal	(132.9 L)
Maximum Hot Water Usage (per cycle)	4.4 gal	(16.7 L)
Drain Diameter (O.D.)	3"	(7.6 cm)
Floor to Center of Drain	6 7/8"	(17.5 cm)


## Electrical Requirements:

Model	Volts / Hz / Phase / Wiring	Circuit Breaker / Running Amps / Wire Size
-12	208-240 / 60 / 1 / 2 wire + ground	15 amp / 6.2 amp / #12
-12	208-240 / 60 / 3 / 3 wire + ground	15 amp / 6.2 amp / #12
-39	230 / 50 / 1 / 2 wire + ground	15 amp / 6.2 amp / 3.5 mm <sup>2</sup>
-59	230 / 50 / 1 / 2 wire + ground	15 amp / 6.2 amp / 3.5 mm <sup>2</sup>

## Installation Recommendations:

Minimum Clearance Between Machines	1/2"	(1.3 cm)
Minimum Clearance Behind Machines	24"	(61 cm)
Minimum Concrete Thickness	8"	(20.3 cm)

## Pending Approvals\*

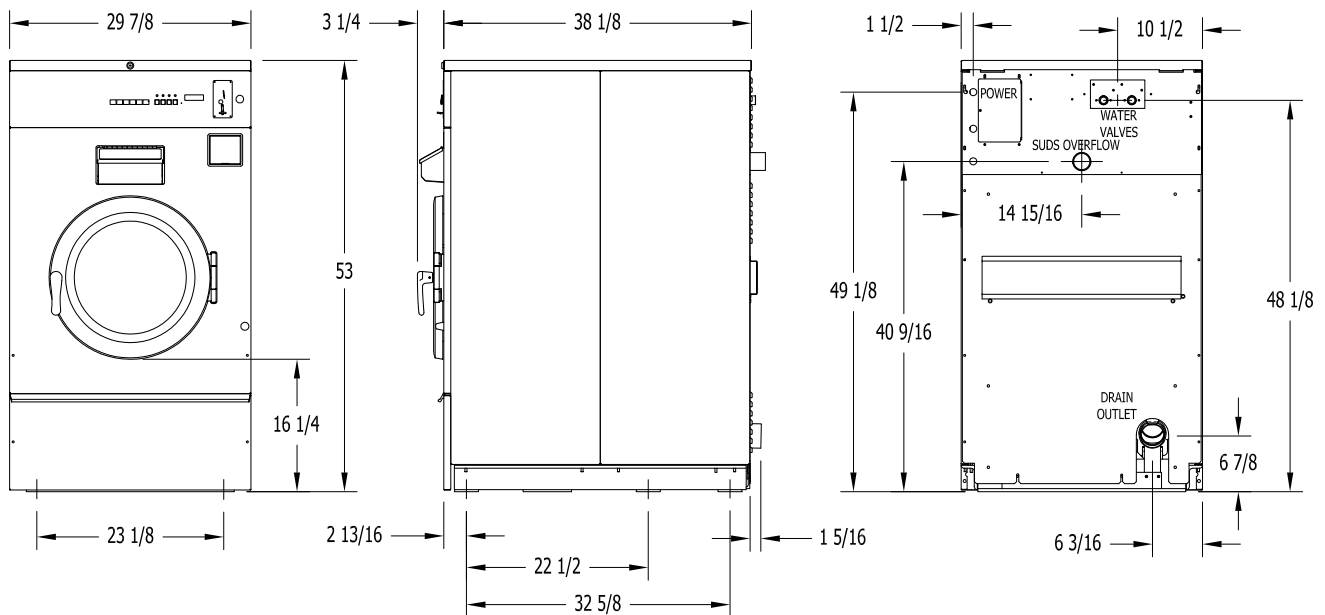

FRONT

SIDE

BACK